




Connecting PATCH Diagram

HOW-TO: CONNECT YOUR PATCH MODEL IN MULTIPLE CONFIGURATIONS



Connecting PATCH Diagram

GENERAL TRACKING, MIXING & MASTERING WITH SUMMING SECTION

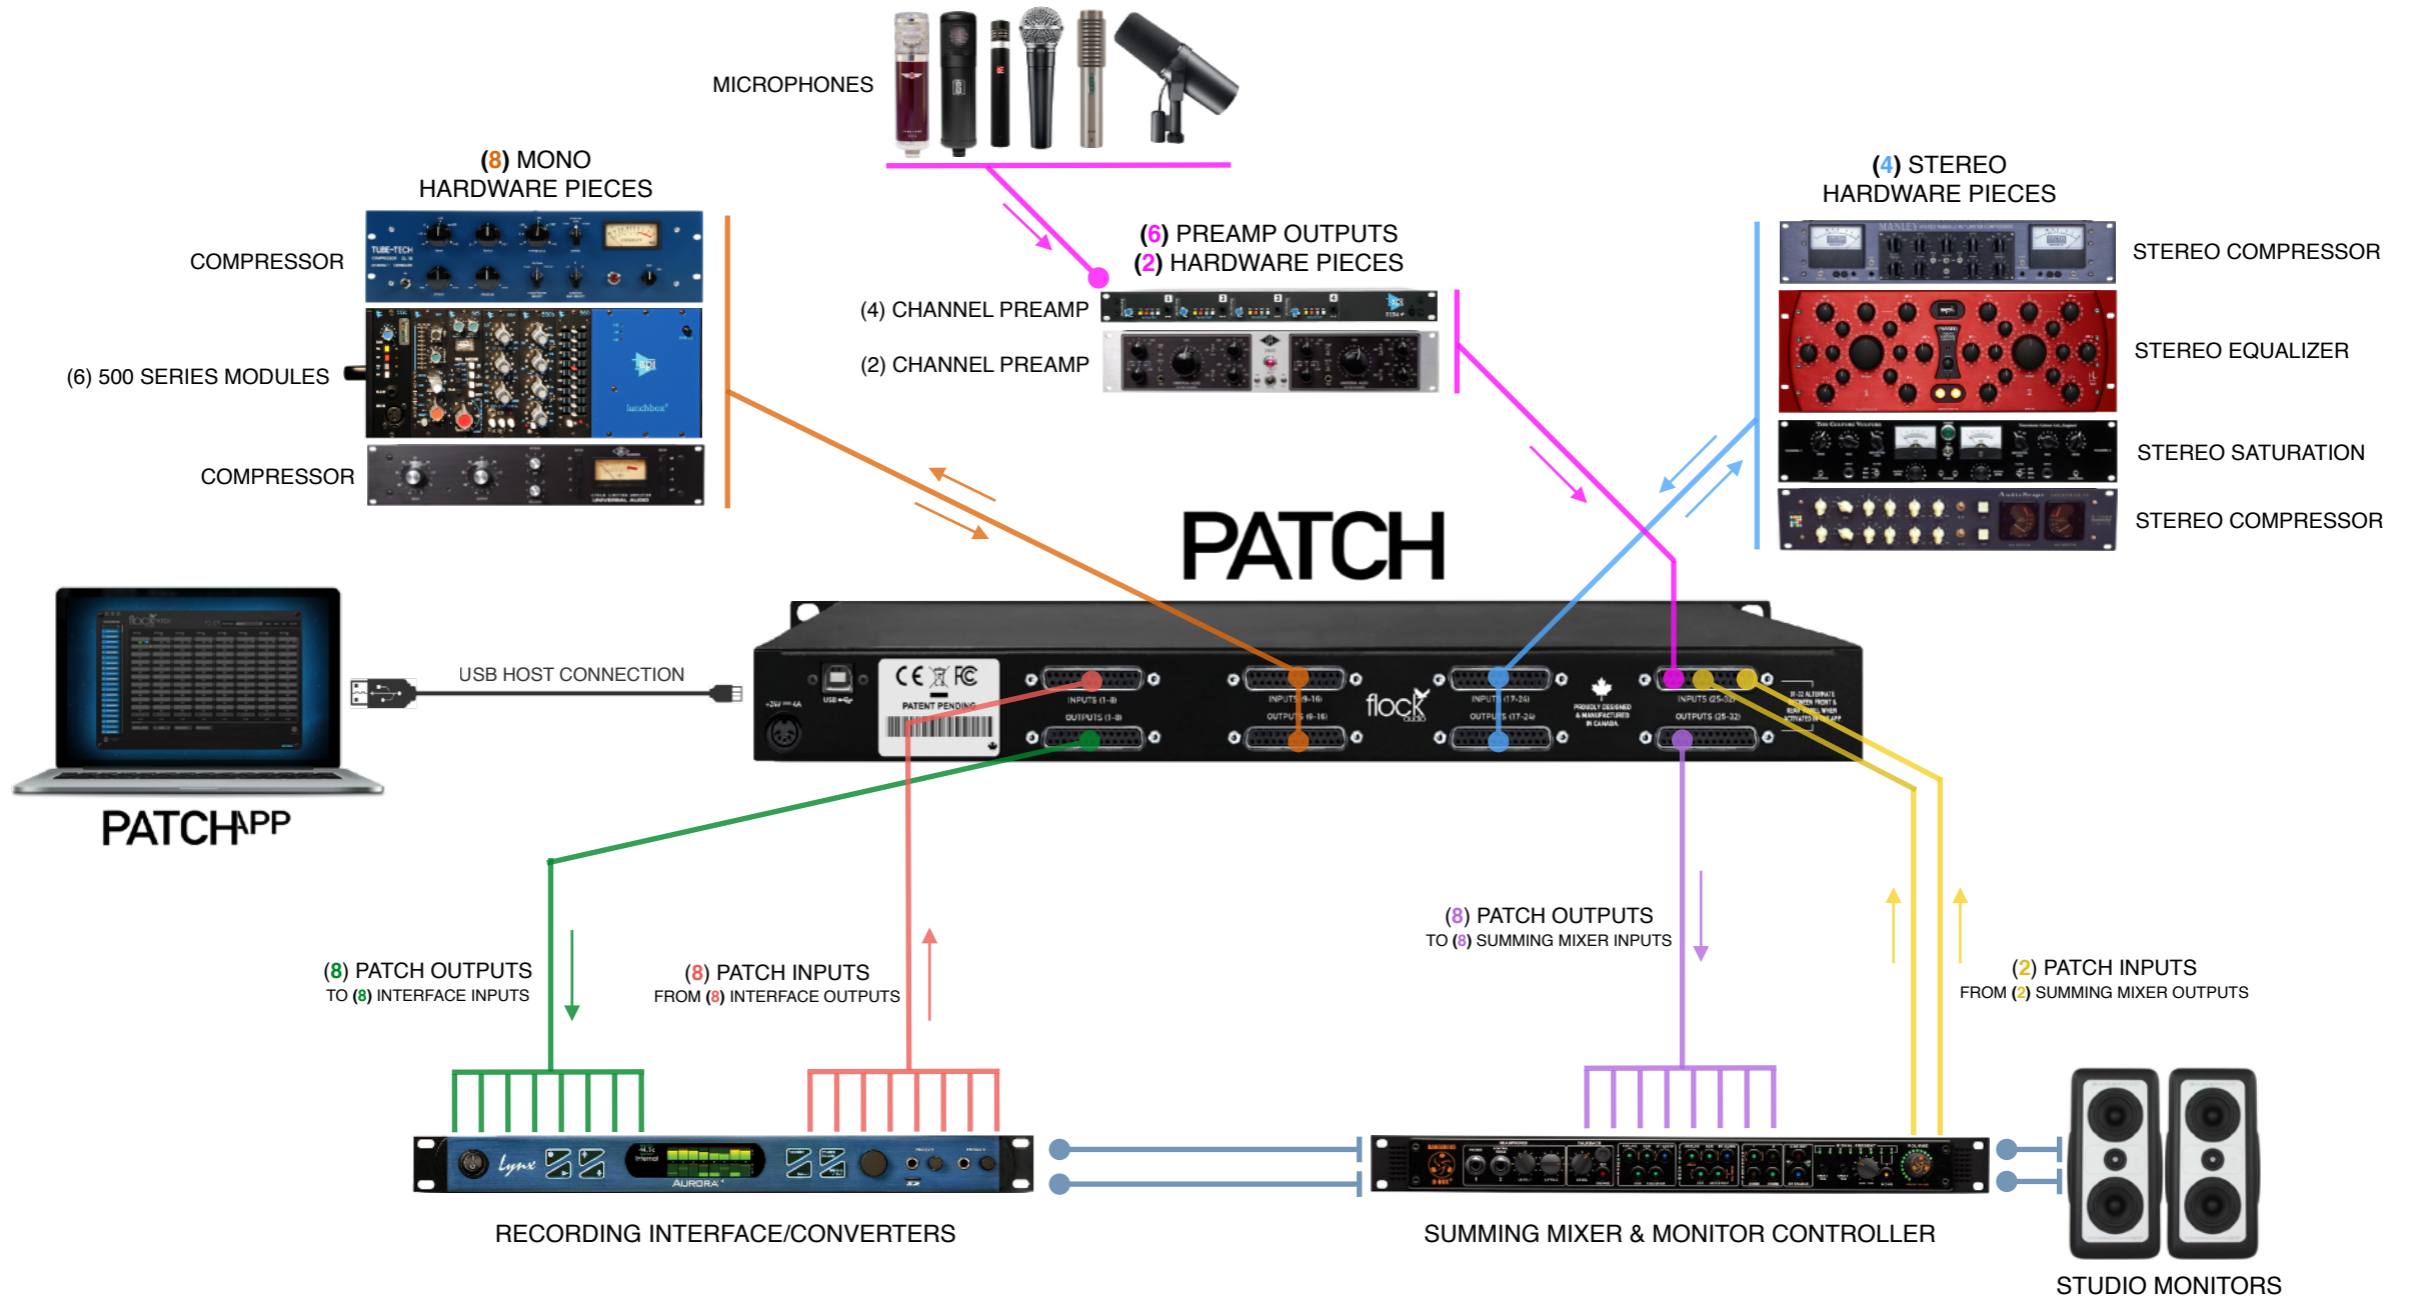

The PATCH Series models are all a +4 Professional Line Level Design. When connecting Microphones directly to the PATCH Series Hardware, Standard Audio Engineering Practices should be exercised such as the understanding that mixing Signal Levels may or may not exhibit audio level &/or electronic noise floor artifacts. If undesired results are experienced when connecting Microphones directly to the PATCH Series, it is recommend to have a dB Booster or Transparent Preamp between the Microphone and PATCH Model Connection (I.E. Mic -> Pre/dB Booster -> PATCH) to achieve the best possible audio signal levels for routing.

